


Quick Release
V-Band Clamp



GENERAL SPECIFICATIONS:

- Maximum Flow: 50 GPM (No minimum flow requirement)
- Maximum Pressure: 125 PSI
- Maximum Temperature: 135° F
- Screen Surface Area 367 Sq. In.

MATERIALS:

- Housing: 304 Stainless Steel
- Gasket: EPDM standard (other compounds available)
- Screen: 60 Mesh-316 Stainless, 1/4" perforated sheet backup-316 Stainless

NOTES:

- 1- Dimensions are for informational purposes only and are subject to change.
- 2- 52" Overall height required for filter element removal.

3/4" NPT
(Spray Nozzle
Attachment)

Air Relief Valve
1/2" NPT

Conical Filter Element
(See Specifications)

OUTLET
Ferrule for 2"
Sanitary Clamp

Stainless Steel
Elbow & Riser Pipe

1/4" NPT(f)
Gauge Ports

24 7/8"

40 1/16"

13 7/16"

6 3/16"

SECTION A-A

B


SECTION B-B

Ø 11 1/2"

INLET
Ferrule for 2"
Sanitary Clamp

FLUSH PORT
Ferrule for 2"
Sanitary Clamp

Serial Number
Location

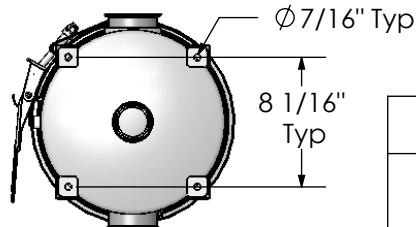

PRODUCT SPECIFICATION

MILLER-LEAMAN INC.

800 Orange Ave. Daytona Beach FL 32114

| | | |
|--------------|-----------|------------|
| DRAWN | J. Larsen | 4/15/08 |
| CHECKED | | |
| ENG APPR. | | |
| MKT APPR. | | |
| SHEET 1 OF 1 | | REVISION A |

TITLE

Thompson Strainer
w/Sanitary Connections and
Special Rinse Nozzle Feature