


THOMPSON FILTER EFFICIENCY CURVES

INDUSTRY'S LOWEST PRESSURE DROP


All Thompson Filters have been designed to operate with less than a 1 PSI pressure loss during maximum flow when clean. This exceptional efficiency results in less energy consumption and reduced operating costs. Call us today for a free energy savings

**2" THOMPSON FILTER (MLI-2)
Maximum Flow 100 GPM**

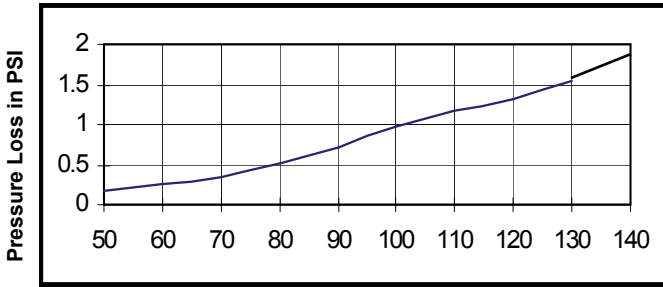


Gallons Per Minute

**3" THOMPSON FILTER (MLI-3)
Maximum Flow 200 GPM**

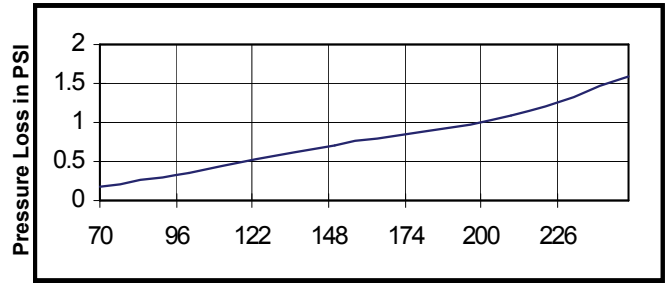


Gallons Per Minute

**4" THOMPSON FILTER (MLI-4B & MLI-4C)
Maximum Flow 350 GPM**

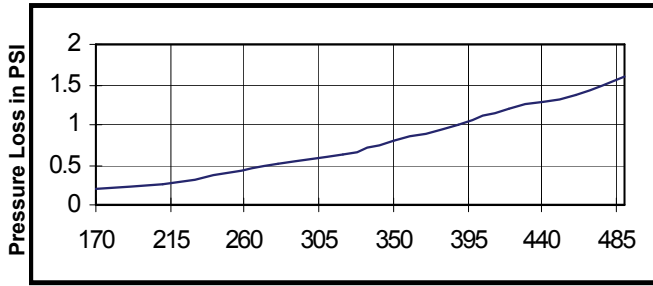


Gallons Per Minute

**6" THOMPSON FILTER (MLI-6)
Maximum Flow 750 GPM**

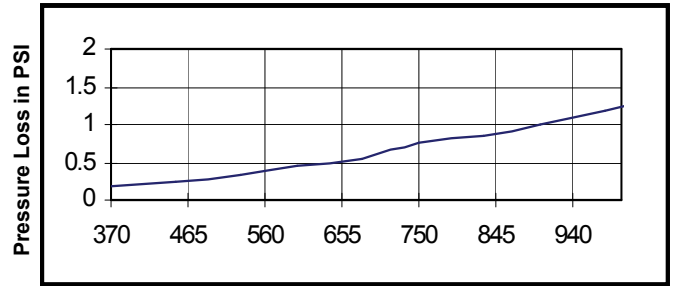


Gallons Per Minute

**8" THOMPSON FILTER (MLI-8)
Maximum Flow 1300 GPM**

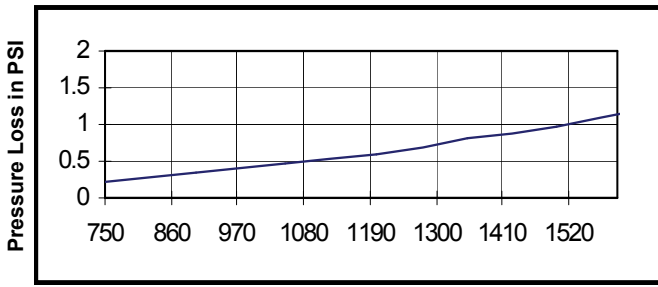

Gallons Per Minute

**10" THOMPSON FILTER (MLI-10)
Maximum Flow 2000 GPM**

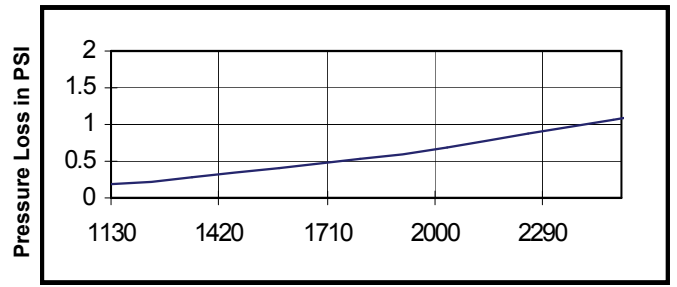

Gallons Per Minute

** ALL PRESSURE LOSS CURVES REFLECT STANDARD MESH SIZING OF 16 - 200 MESH.*



MILLER-LEAMAN

INCORPORATED

800 ORANGE AVE. - DAYTONA BEACH, FL 32114 (800) 881-0320 - PHONE (386) 248-0500 - FAX (386) 248-3033
FOR MORE TECHNICAL DATA ONLINE: www.millerleaman.com